

**(19) World Intellectual Property
Organization
International Bureau**



(43) International Publication Date
7 July 2005 (07.07.2005)


PCT

(10) International Publication Number
WO 2005/060499 A2

- | | |
|--|--|
| <p>(51) International Patent Classification: Not classified</p> | <p>(81) Designated States <i>(unless otherwise indicated, for every kind of national protection available):</i> AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.</p> |
| <p>(21) International Application Number:
PCT/US2004/039172</p> | |
| <p>(22) International Filing Date:
22 November 2004 (22.11.2004)</p> | |
| <p>(25) Filing Language: English</p> | |
| <p>(26) Publication Language: English</p> | |
| <p>(30) Priority Data:
10/737,345 16 December 2003 (16.12.2003) US</p> | <p>(84) Designated States <i>(unless otherwise indicated, for every kind of regional protection available):</i> ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).</p> |
| <p>(71) Applicant and
(72) Inventor: NIEMCZYK, Andrew [US/US]; 11376 Sobieski, Hamtramck, MI 48212 (US).</p> | |
| <p>(74) Agent: PERMUT, Steven, L.; Reising, Ethington, Barnes, Kisselle, P.C., P.O. Box 4390, Troy, MI 48099 (US).</p> | |

[Continued on next page]

(54) Title: BASEMENT WALL WATER PROTECTION SYSTEM

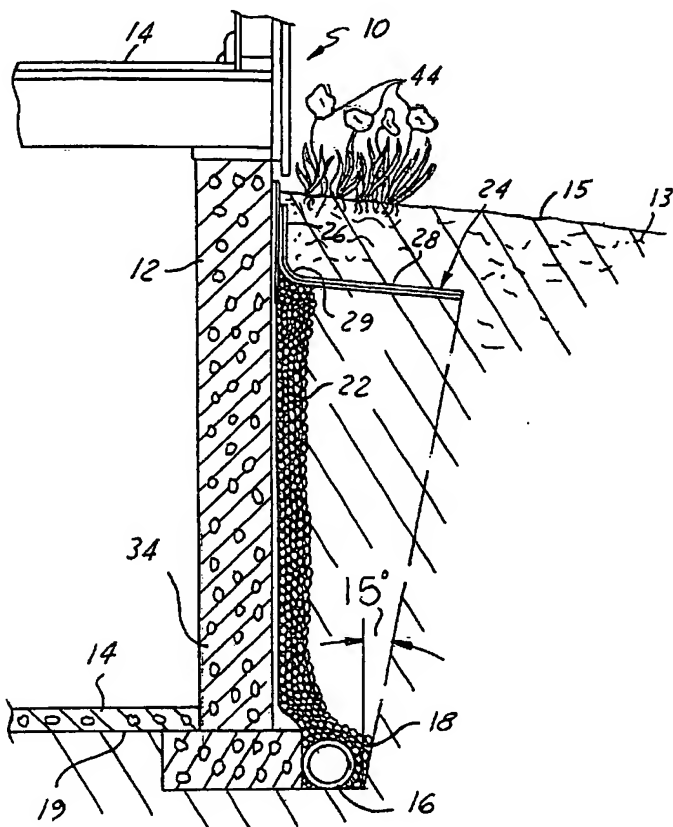

(57) Abstract: A basement wall protection system has a plurality of plate members (24) with a short leg section (26) abutting a basement wall (12) and a shelf section (28) extending outward at about a 5° cant away from the wall and extending at least the length of basement wall below the plate member 24 times the tangent of 15°. The plate member (24) are connected together via watertight joints (39).



Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv)) for US only*

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.